

LED Filament G30(7W/8W)

Description:

Efficacy: 120lm/W
 Life Time: 25,000 HR
 RoHS
 UL Certification

Replacement:

60W Incandescent Bulbs
 75W Incandescent Bulbs




Parameters:

Material: Glass
 Input Voltage: 120/220VAC; 50/60Hz
 CCT: 2700K/4000K/6000K
 CRI: >80

View Angle: 360°
 Power Supply: Non-Isolate Drive
 Weight: 55g
 Life: 25,000 hr

Part NO.	CCT	CRI	Lumen	Input Voltage	Wattage	PF	Base	Dim
BL.XXA07JLQC00U	2700K	80	800lm	90-135V/60Hz	7W	0.5	E26	NO
BL.XXA07JLQCD0U	2700K	80	800lm	120V/60Hz	7W	0.9	E26	YES
BL.XXB07JKQC000	2700K	80	800lm	176-264V/50Hz	7W	0.5	E27	NO
BL.XXB07JKQCD00	2700K	80	800lm	220-230V/50Hz	7W	0.7	E27	YES
BL.XXA08JLQC00U	2700K	80	1000lm	90-135V/60Hz	8W	0.5	E26	NO
BL.XXA08JLQCD0U	2700K	80	1000lm	120V/60Hz	8W	0.9	E26	YES
BL.XXB08JKQC000	2700K	80	1000lm	176-264V/50Hz	8W	0.5	E27	NO
BL.XXB08JKQCD00	2700K	80	1000lm	220-230V/50Hz	8W	0.7	E27	YES

Packing information:

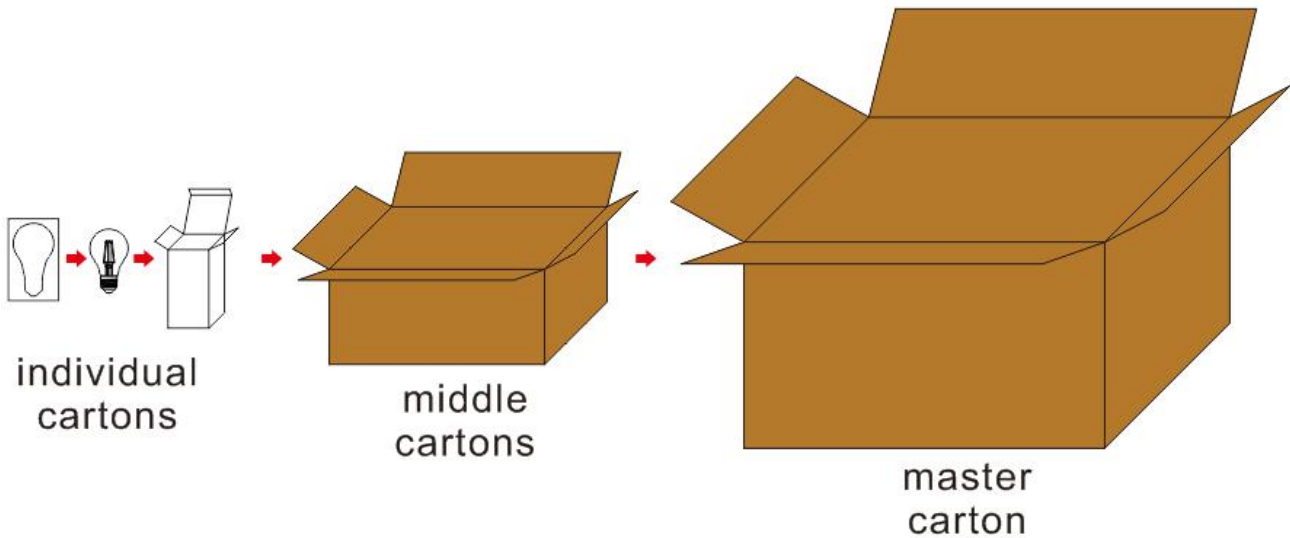

Master carton size:535*440*320mm
 Net weight:2.7kg; Gross weight:8.7kg
 15 bulbs/middle carton, 4 middle cartons/master carton

Installation:

Connect to E26/E27 base

Note:

1. The input voltage is 120/220VAC
2. Turn power off when install the LED filament bulbs
3. Check the bulbs and make sure it's undamaged before installation
4. LED filament bulbs are not suitable for insulated places
5. LED filament bulbs are prohibited installed outdoor place



Description of Dimmer Matching

Our LED lights have been designed and worked with listed dimmers:

For 2W-5W

LEVITON:

R62-6674-P0W
 C22-6672-1LW
 R70-6631-1LW

LUTRON:

DV-600P-WH
 MACL-153MR-WH
 CT-600PR-WH

For >5W

LEVITON:

R62-6674-P0W
 R70-6631-1LW

LUTRON:

DV-600P-WH
 MACL-153MR-WH

Remark:

1. Mismatch dimmer may lead to poor lighting effect.
2. Dimming range:20%-80%.
3. For the items less than 3W, one dimmer has to be connected with more than 2pcs each time.